

Better Everywhere



Water Wells



City Water



Irrigation




Water Treatment

- For Water Well Systems - Inside and Out
- For Residential and Commercial Plumbing Systems
- For Landscape Irrigation
- For Misting Systems and Animal Feedwater Systems

Technical Specifications

| TwistItClean Model Details | | | | | | |
|----------------------------|---------------|--------------------|-------------------|-------------------------------|-----------------|-------------------|
| Model | Max Flow Rate | | Inlet/Outlet Size | Effective Screen Surface Area | | Screen Flush Size |
| | U.S. gpm | m ³ /hr | | in ² | cm ² | |
| T2C-075 | 25 | 5.5 | 3/4 in. male NPT | 12.02 | 77.5 | 1/2 in. |
| T2C-100 | 39 | 8.9 | 1 in. male NPT | 12.02 | 77.5 | 1/2 in. |
| T2C-150 | 78 | 17.7 | 1-1/2 in male NPT | 24.79 | 159.9 | 3/4 in. |
| T2C-200 | 150 | 34.0 | 2 in. flanged | 55.5 | 358.1 | 3/4 in. |

Maximum Pressure: 100 psi (6.9 bar)
Maximum Temperature: 120°F (49°C)

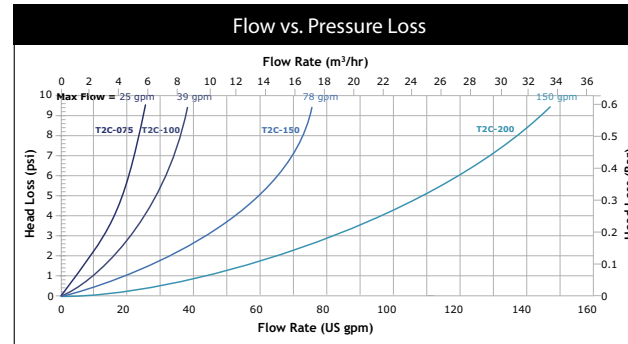

| Dimensions | | | | | | | | |
|------------|----------|-----|-------|-----|--------|------|-------------------|------|
| Model | Height | | Width | | Weight | | Weight with Water | |
| | in | mm | in | mm | lbs | kg | lbs | kg |
| T2C-075 | 11-7/8 | 301 | 6 | 152 | 2 | .91 | 3 | 1.36 |
| T2C-100 | 11-7/8 | 301 | 6 | 152 | 2 | .91 | 3 | 1.36 |
| T2C-150 | 15-1/4 | 387 | 7-1/2 | 191 | 6 | 2.72 | 9 | 4.08 |
| T2C-200 | 24-15/16 | 634 | 10.22 | 260 | 11 | 4.99 | 19 | 8.62 |



The following models are NSF certified as "low lead": T2C-075-30, T2C-075-60, T2C-075-100, T2C-075-140, T2C-100-30, T2C-100-60, T2C-100-100, T2C-100-140, T2C-150-30, T2C-150-60, T2C-150-100, T2C-150-140



1365 North Clovis Avenue • Fresno, California 93727 USA
Telephone: (559) 255-1601 • FAX: (559) 255-8093
www.lakos.com • info@lakos.com

LS-747D (Rev. 2/16)

The Better Filter!



- Exclusive Reverse-Flush Cleaning Action
- No Messy Disassembly
- Less Cleaning



TWISTITCLEAN™
INLINE WATER FILTERS

Sand • Grit • Sediment • Rust Particles • Scale • Silt


Patented Reverse Flushing Action

With a 1/4 turn of the handle:

- 1 Flow direction through the filter element is changed to inside-out.
- 2 The filter element is lifted to open the bottom flush port.
- 3 An inside-out backwash occurs, and the filter element is thoroughly cleaned.

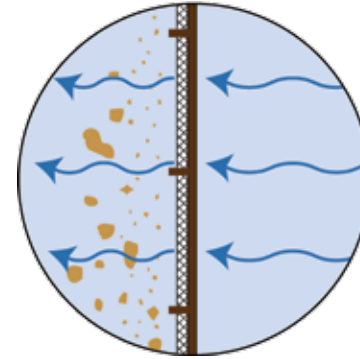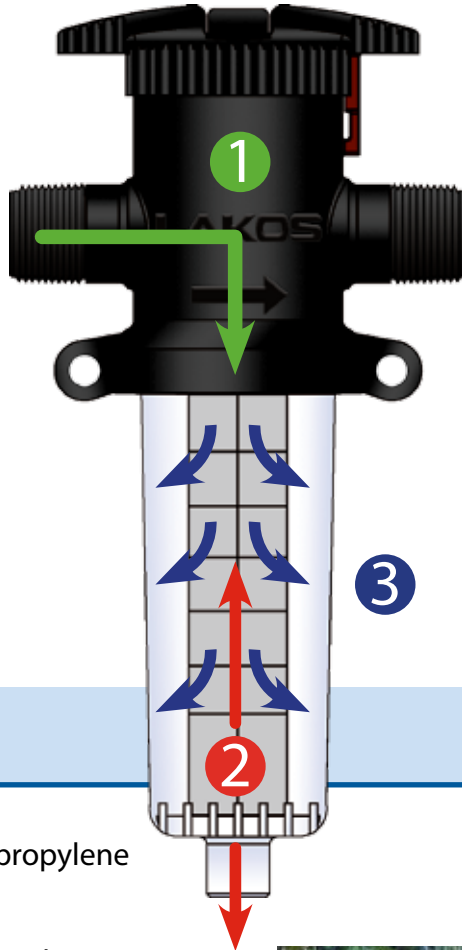

Only TwistII Clean filters use "reverse-flush" action to completely clean the screen.



Traditional screens use ineffective "wash-by" action, leaving sediment trapped in the screen

VS.



Messy cleaning and damaged screens are common when traditional filters become clogged.

Better Built

- UV-Resistant, Glass-Filled Polypropylene
- Built-in Mounting Tabs
- No Tools Required for Servicing/Cleaning
- No Disassembly Required to Clean
- Automation Available for T2C-200

Materials of Construction:

Body: Glass-filled Polypropylene
Clear Body: Acrylic
Seals: EPDM; Flush Port O-ring is Viton
Screens: Stainless Steel
SunShield: Neoprene



SunShield protects against algae growth on screen

Better & Bigger Screens

- Stainless Steel Screens Provide Greater Durability and Longer Life
- Screens Are 200% Larger Than Traditional Screens for Greater Capacity and Less Routine Maintenance
- Color-coded by Screen Mesh for Easy Identification

