


Introducing our new, patent pending, UV SENSOR featuring easy to replace secondary window and leak resistant one piece primary PTFE probe body.



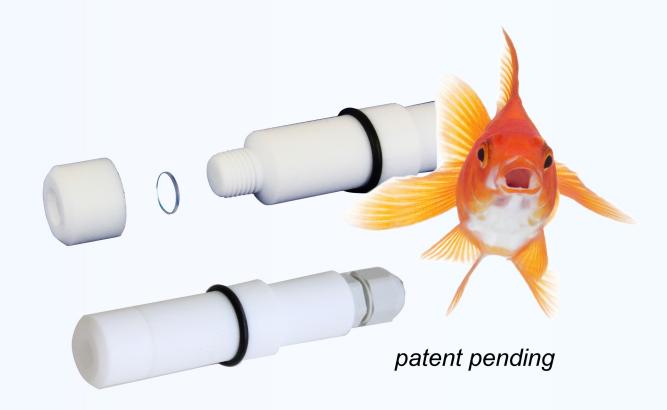

Easy to assemble, the secondary quartz window can be quickly replaced, immediately solving alarms due to fouling.

No tools required.

All sensors shipped with spare window

REPLACEMENT PARTS

SENSOR ASSEMBLY P/N 400285 (NSF)

P/N 400195 (STANDARD)

QUARTZ WINDOW

P/N 400378

PTFE CAP

P/N 400380

O RING KIT

P/N 400289

